

RAL OSE - SDS / 02


350 Meters 12man Saturation Diving System

BUILT: 1980

Refurbished by: RAL OSE
Testing / Standards: LR

SERVICES REQUIRED

Electric Power supply Main supply: 800 A 440 V 60 Hz
Emergency supply: 250 A 440 V 60 Hz

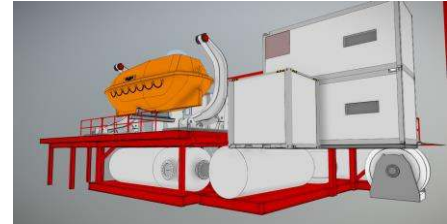

:

:

Living Chambers

MAINLock01 (16.25 m ³)	:6 man
MAINLock02 (11.4 m ³)	:3 man
MAINLock03(11.4 m ³)	:3man

Diving Bell

Capacity	:3 man
Diver Lockout capability	:2 man
Diver Hat Mounted Camera System	:2
Volume	:4.6m ³
Mating to DOC	:Side

Reclaim system

Type	:Electrical Gasmizer
	:Haske1
Pumps	

Sat Control System : Clear Brook

Hyperbaric Life Boat

HLB(11.7) : 12man Rescue

Umblicals

Bell	:Fibron 350 mts
Diver 1	:50mts
Diver2	:50mts
Stand by diver	:50mts

Life support machinery

Diver hot water unit	:Kinergetics
ECU	:Kinergetics

Dive Control System: Clear Brook